

Wave Optics: INTERFERENCE and DIFFRACTION

RADIATION: Electromagnetic wave

LIGHT: Transverse E.M. wave

$$\lambda_0: 400 \text{ nm} < \lambda_0 < 800 \text{ nm} \text{ [In Vacuum]}$$

$$f: 4 \times 10^{14} < f < 8 \times 10^{14} \text{ Hz}$$

$$\text{Speed } c = \frac{1}{\sqrt{\mu_0 \epsilon_0}} = 3 \times 10^8 \text{ m/sec in vacuum}$$

$$v = \frac{c}{n} \text{ in medium, } n > 1$$

$$\lambda_n = \frac{\lambda_0}{n}$$

We can represent a light wave travelling along x as an E -wave

$$E = E_m \sin(kx - \omega t + \phi), \quad \vec{E}_m \perp \hat{x}$$

$$k = \frac{2\pi}{\lambda}$$

$$\omega = \frac{2\pi}{f}$$

E_m = amplitude, ϕ = phase.

SUPERPOSITION:

Recall that when more than one ~~wave~~ ^{wave} is present at the same point at the same time, the net effect is obtained by making an algebraic sum.

Let us consider two light waves

$$E_1 = E_m \sin(kx - \omega t + \phi_1)$$

$$E_2 = E_m \sin(kx - \omega t + \phi_2)$$

That is, they have the same wavelength and the same frequency but the phases are different.

As discussed in class, emission of light involves an electron jumping from ^{one} energy level to another in its parent atom and each jump lets out a wave train of about 3m long. Since there are "zillions" of atoms we have enormous numbers of wave trains with arbitrary phases so a light wave from a source has a phase which varies randomly in time.

If you superpose E_1 and E_2 you will get

$$E = E_1 + E_2 \\ = 2 E_m \cos\left(\frac{\phi_1 - \phi_2}{2}\right) \sin\left(kx - \omega t + \frac{\phi_1 + \phi_2}{2}\right)$$

That is, a wave whose amplitude is

$$\text{Amp} = 2 E_m \cos\left(\frac{\phi_1 - \phi_2}{2}\right)$$

Intensity $I \propto (\text{Amp})^2$

So $I \propto 4 E_m^2 \cos^2\left(\frac{\phi_1 - \phi_2}{2}\right)$

[The factors $\frac{1}{2} \epsilon_0 c$ are left out].

Two totally different situations arise.

Case I The sources of E_1 and E_2 are

INCOHERENT

That is, $(\phi_1 - \phi_2)$ is a random function of time. If so, I is also a random function of time. The observed value will be a time average:

$$\langle I \rangle \propto 4E_m^2 \left\langle \cos^2 \left(\frac{\phi_1 - \phi_2}{2} \right) \right\rangle$$

But $\left\langle \cos^2 \left(\frac{\phi_1 - \phi_2}{2} \right) \right\rangle = \frac{1}{2}$

So $\langle I \rangle \propto 2E_m^2$


Hence, for two incoherent sources the total intensity is just the sum of the two intensities. Two light bulbs just increase brightness.

Case II The sources of E_1 and E_2 are ~~coherent~~ ^{COHERENT}.

That is, the waves E_1 and E_2 are specially prepared in such a way that $(\phi_1 - \phi_2)$ is a fixed (independent of time for our discussion) at any given location. [This is the case we discussed for sound waves a few weeks ago].


So how do we get two coherent light sources. We discuss two examples.

DOUBLE SLIT INTERFERENCE

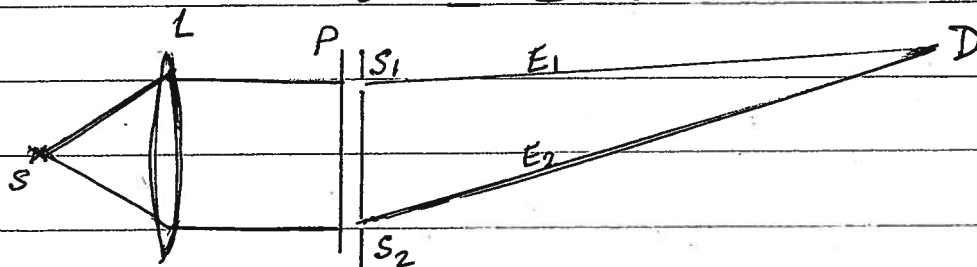

S is a point source of light located at the focal point of a convergent lens. After passing through the lens the light becomes a parallel beam. The corresponding wave front is a plane P travelling towards the right. Now place a ~~screen~~ ^{plate} with two small holes each of width w separated by d . Assume $w \ll d$. The waves which emerge from S_1, S_2 are both derived from the SAME wave front so at S_1 & S_2 they have same phase (say zero). By the time they arrive at the detector D their phases would have changed (see details below) but $(\phi_1 - \phi_2)$ does NOT vary with time. We have two coherent sources producing E_1, E_2 at D .

[In your expt. the source is a laser which produces a parallel

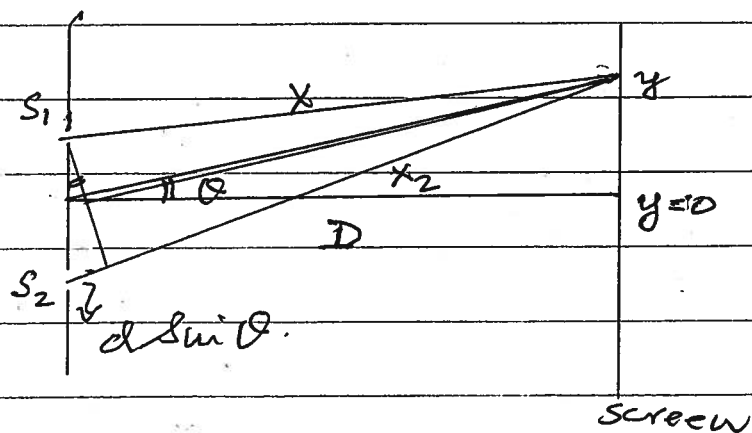

a parallel

beam. S_1, S_2 are slits in a plate and you used a screen to view the interference pattern. Separation ~~bet~~ ^{between} S_1 and $S_2 = d$

distance to screen = D .

Position of detector = y [$y=0$ at mid-pt of sources].

x_1 = distance travelled by E_1

x_2 = distance travelled by E_2

At y : Phase of E_1 , $\phi_1 = \frac{2\pi}{\lambda} x_1$.

Phase of E_2 , $\phi_2 = \frac{2\pi}{\lambda} x_2$.

$$\left(\frac{\phi_1 - \phi_2}{2}\right) = \frac{2\pi}{\lambda} \left(\frac{x_1 - x_2}{2}\right)$$

If $(x_1 - x_2) = M\lambda$, $M = 0, \pm 1, \pm 2, \dots$

$$\frac{\phi_1 - \phi_2}{2} = M\pi$$

$$\cos^2\left(\frac{\phi_1 - \phi_2}{2}\right) = 1$$

So at such points I will be maximum

CONDITION FOR MAXIMA

$$(x_1 - x_2) = M\lambda, \quad M = 0, \pm 1, \pm 2, \dots$$

However, if $(x_1 - x_2) = \left(m + \frac{1}{2}\right)\lambda$, $m = 0, \pm 1, \pm 2, \dots$

$$\frac{\phi_1 - \phi_2}{2} = \left(m + \frac{1}{2}\right)\pi$$

$$\cos^2\left(m + \frac{1}{2}\right)\pi = 0 \quad \underline{\underline{I = 0}}$$

CONDITION FOR MINIMA.

$$(x_2 - x_1) = \left(m + \frac{1}{2}\right) \lambda.$$

From the picture you can see that

$$(x_2 - x_1) = d \sin \theta.$$

so $d \sin \theta_m = m \lambda$ [Maxima]

$$d \sin \theta_m = \left(m + \frac{1}{2}\right) \lambda$$
 [Minima].

and, of course, all angles are small, ~~being~~
~~being~~ $\frac{\lambda}{d} \ll 1$.

Consider the y -coordinate of the M^{th} maximum.

$$\frac{y_M}{D} = \tan \theta_m = \sin \theta_m$$
$$= \frac{m \lambda}{d}.$$

Similarly, its next neighbor has


$$\frac{y_{M+1}}{D} = \frac{(M+1) \lambda}{d}.$$

so $y_{M+1} - y_M = \frac{D \lambda}{d}.$

so for two slit interference

$$I = \frac{1}{2} E_0 C \cdot 4 E_m^2 \cos^2 \left(\frac{\phi_1 - \phi_2}{2} \right)$$

and consists of equally spaced $\left(\frac{D \lambda}{d}\right)$ equal
intensity $\left(\frac{1}{2} E_0 C \cdot 4 E_m^2\right)$ fringes.

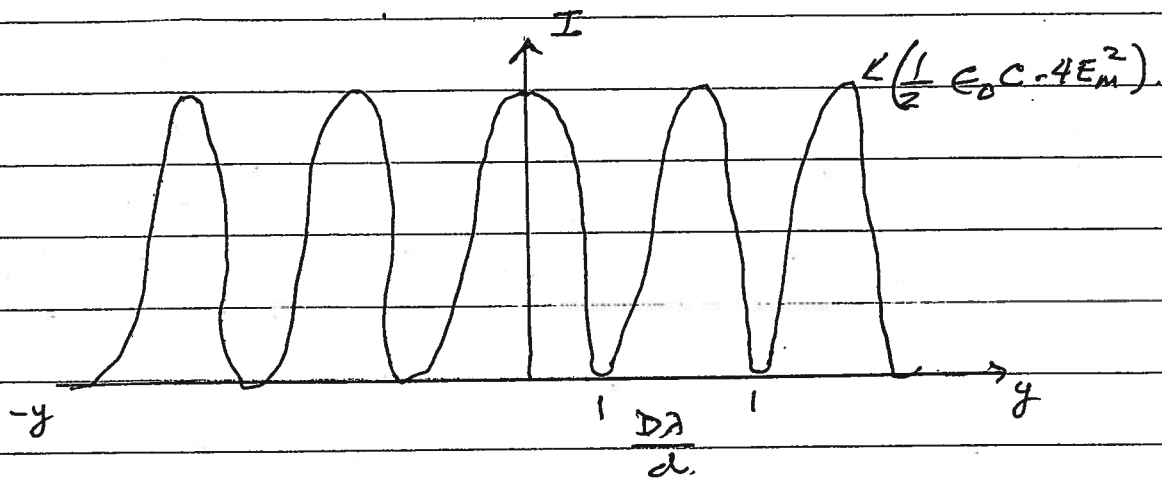


space

Average of Intensity on Screen

$$\langle I \rangle = \frac{1}{2} \epsilon_0 c \cdot 2 E_m^2 \quad \left[\langle \cos^2 \theta \rangle = \frac{1}{2} \right]$$

II THIN FILM INTERFERENCE

A Thin film
of thickness
 t and refractive
index n is
deposited on

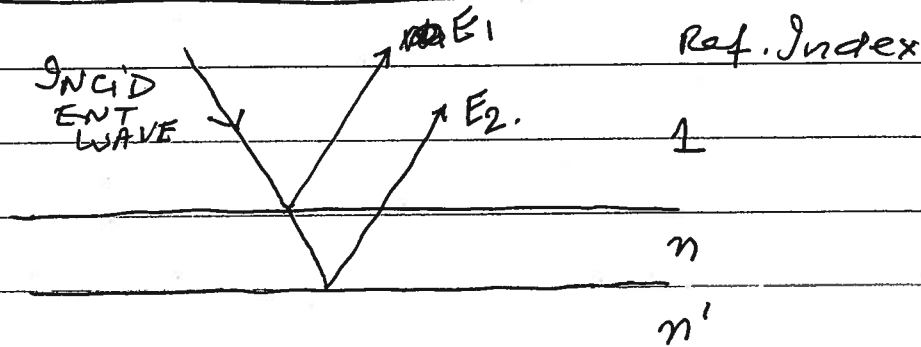

a block of refractive index n' . A light wave is incident on the top surface at an angle of incidence of a fraction of a degree ($i \approx 0, r \approx 0, R \approx 0$). On reflection from the top surface we get one wave (designated E_1), part of the light enters the film and gets reflected at the bottom surface producing the second wave (E_2). Both E_1 and E_2 are derived from the same

incident wave so their phase difference is a fixed quantity depending on the thickness t . E_1 & E_2 are coherent.

The conditions for maxima and minima are of course,

$$x_2 - x_1 = M\lambda \quad M = 0, \pm 1, \pm 2, \dots$$

$$\text{or} \quad x_2 - x_1 = \left(m + \frac{1}{2}\right)\lambda \quad m = 0, \pm 1, \pm 2$$

However, now we ~~also~~ must also consider what happens to the phase when a wave ~~is reflected~~ ^{undergoes} reflection.


Recall what we learned while studying reflection of waves on stretched strings except now we cast it in terms of E-wave.

Incident wave

$$E_i = E_{mi} \sin(kx - \omega t)$$

Reflected wave

$$E_r = E_{mr} \sin(kx + \omega t)$$



Boundary at $x=0$

$$\text{and} \quad \frac{E_{mr}}{E_{mi}} = \frac{v_1 - v_2}{v_1 + v_2}$$

Let us compare waves at $x=0$ where reflection occurs.

$$E_i = E_{mi} \sin(-\omega t) = E_{mi} \sin(\omega t + \pi)$$

$$E_2 = E_{m2} \sin \omega t$$

Two cases arise

i) $v_1 < v_2$ [$n_1 > n_2$]

$\frac{E_{m2}}{E_{m1}}$ is -ive.

~~E_{m1}~~ $E_i = E_{m1} \sin(\omega t + \pi)$

$$E_r = + E_{m2} \sin(\omega t + \pi)$$

No Phase change.

ii) $v_1 > v_2$ [$n_1 < n_2$]

$\frac{E_{m2}}{E_{m1}}$ is +ive.

$$E_i = E_{m1} \sin(\omega t + \pi)$$

$$E_r = E_{m2} \sin \omega t$$

Phase change of π on reflection.

Now let us consider interference between E_1 and E_2 .

First, extra distance travelled by E_2 is $2t$ but refractive index is n so wavelength in medium is $\frac{\lambda_0}{n}$ where λ_0 is wavelength in air. change

Next, if $n' > n$ [$v' < v$] there is π phase for both E_1 and E_2 so condition for maximum is

$$2nt = M\lambda_0 \quad M = 0, \pm 1, \pm 2, \dots$$

However, if $n' < n$ [$v' > v$], only E_1 has a phase change, while E_2 has none so condition for maximum becomes

$$2nt = \frac{\lambda_0}{2} = M\lambda_0$$

Notice a phase change of π is like a path difference of $\frac{\lambda_0}{2}$.

Colors of thin films of oil on water, or the surface of soap bubbles, arise because of thin film interference.


Non-reflecting glass is produced by depositing a thin layer of transparent material and ensuring destructive interference for $\lambda_0 \sim 600\text{nm}$ [Green light].

MULTIPLE SOURCE INTERFERENCE - ALL SOURCES COHERENT.


of Sources

Amplitudes


2.



3.




4

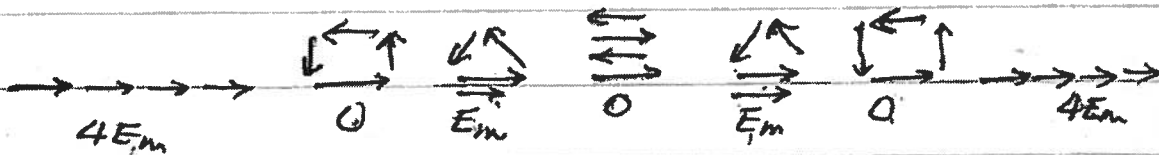

DIFFRACTION - SINGLE SLIT

Diffraction arises because of superposition of a very large number of waves. Experimentally, it manifests itself by the spreading of a wave when it passes through an opening whose size is comparable to the wavelength that is why sound exhibits diffraction when it goes through doors and windows while ~~light~~ ^{only} diffraction of light is observable, when light goes through ~~thin~~ ^{narrow} slits.

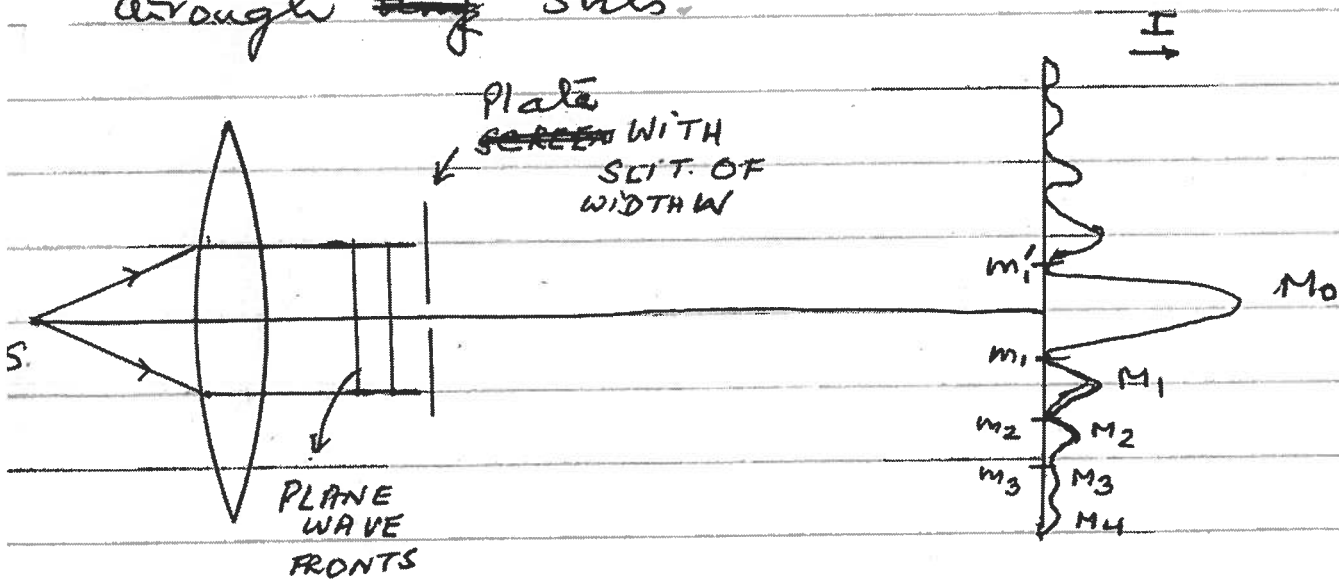

EXPT: S is a point source of light of wavelength λ . It is placed at focal point of lens so after passing through lens we get a parallel beam which is pictured as a plane wave front travelling to the right. We place a ~~screen~~ ^{plate} with a narrow slit of width w and let the light fall on a

screen a distance D away. What you observe is a series of maxima, M_0, M_1, M_2, \dots where the central one M_0 is brightest and the intensity reduces rapidly as you go from $M_0 \rightarrow M_1 \rightarrow M_2 \rightarrow M_3 \rightarrow \dots$. m_1, m_2, m_3, \dots locate the "dark" spots in between.

In the laboratory upstairs you use a laser as a light source as that produces a parallel beam and hence plane wave fronts.

Our challenge is to construct a simple model which will allow us to understand the observations. We begin by recalling Huygen's Construct that every point on a wave front is a source. Thus, it is quite reasonable to claim that the part of the wave front exposed by the slit



gives rise to a large number (say $N \gg 1$) of waves all of which start in step (in phase)

from the wave front. So now we must

try to understand explain how N waves arriving at the screen conspire to produce the intensity pattern observed by us.


CENTRAL MAXIMUM (M_0): All of the waves arrive at the screen in phase. So if each one contributes the amplitude E_m , total amplitude at M_0 would be given by vector addition.

$$\begin{array}{c} \longrightarrow \longrightarrow \longrightarrow \dots \longrightarrow \\ E_m \end{array} = NE_m$$

So intensity of M_0
 $I_0 \propto N^2 E_m^2$ [Again Constants $\frac{1}{2} \epsilon_0 c$ omitted]

FIRST MINIMUM (m_1). Here total intensity is zero.

So we want all N waves to add together to produce a zero.

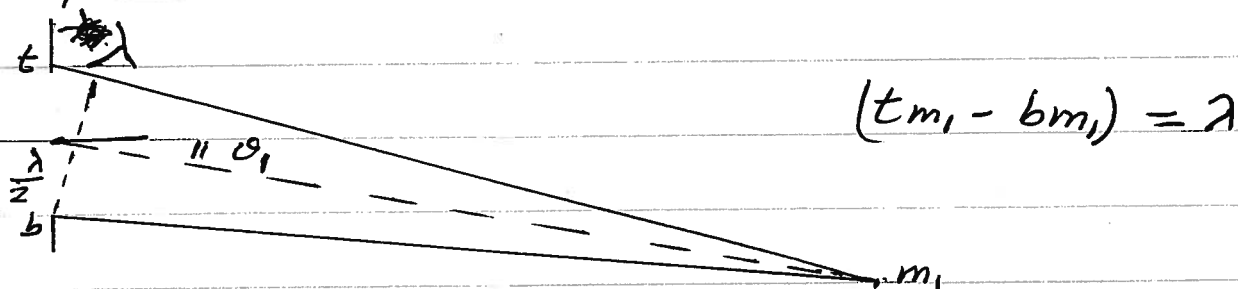

This will happen if the path difference between the wave coming from t and that coming from b is exactly λ . Then the ^{slit} wave ~~front~~ can be split ~~into~~ into two parts; for every wave coming from the lower half there will be one coming from the upper half which is $\frac{\lambda}{2}$ behind and hence they cancel each other.

The angle θ_1 which localises m_1 is therefore

given by


$$\sin \theta_1 = \frac{\lambda}{W}$$

Thus the central maximum, which is bounded by m_1 and m_1' will have a width of $2\theta_1$. The smaller the W the larger the spread due to diffraction.

In terms of the E_m vectors m_1 happens because:

The string of length


$\sum E_m$ has



$$\sum E_m \equiv 0.$$

been wound around so it closes on itself.

First Maximum M_1




$$(tM_1 - bM_1) = \frac{3\lambda}{2}$$

Now the waves arrange themselves so that the path difference between the wave from t and that from b is $\frac{3\lambda}{2}$. Effectively, the slit splits

into 3 equal parts, two of which cancel one another so that only $\frac{1}{3}$ rd of the sources contribute to the amplitude at M_1 .

To calculate the amplitude at M_1 , let us wind our string of length $N E_m$ some more until it looks like.



The sum of all the vectors is A_1 and

$$A_1 \cdot \frac{3\pi}{2} = N E_m.$$

amplitude at M_1


$$A_1 = \frac{2}{3\pi} N E_m.$$

$$I_1 \propto \frac{4}{9\pi^2} N^2 E_m^2$$

$$\frac{I_1}{I_0} = \frac{4}{9\pi^2}$$

M_1 is barely $\frac{1}{20}$ th as intense as M_0 .

Second Minimum: (M_2). This requires us to wind the string even more so it looks like



$$\sum E_m = 0.$$


We need $t_{m_2} - b_{m_2} = 2\lambda$

The slit splits into 4 equal parts

Each quarter cancels its neighbor.

Second Maximum M_2

Continue winding further



$$A_2 = \frac{5\pi}{2} = N E_m$$

$$A_2 = \frac{2}{5\pi} N E_m$$

$$\frac{I_2}{I_0} = \frac{4}{25\pi^2}$$

I_2 is nearly 62 times ~~weaker~~ ^{smaller} than I_0 .

Subsequent minima/maxima follow from the above discuss^{- on}.

TWO-SLIT EXPT: INTERFERENCE + DIFFRACTION

In discussing the two slit case above we assumed that $w \ll d$ so that the central

maximum for diffraction became much broader than the width of the interference

fringes and that allowed us to discuss the interference effect alone. In practice


w and d can be quite comparable and

what you observe is a ~~diffraction pattern~~.


diffraction - cum - interference pattern:
 diffraction maxima with interference
 fringes in them.

Shown below are intensity patterns
 for the case $d = 3w$.

INTERFERENCE

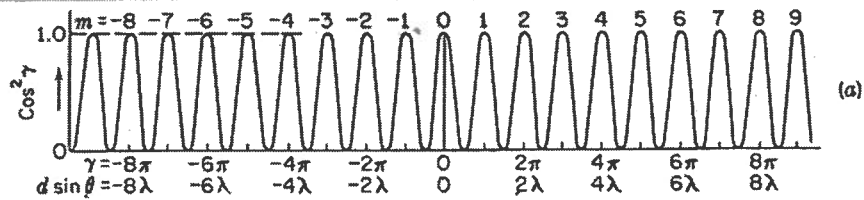

DIFFRACTION

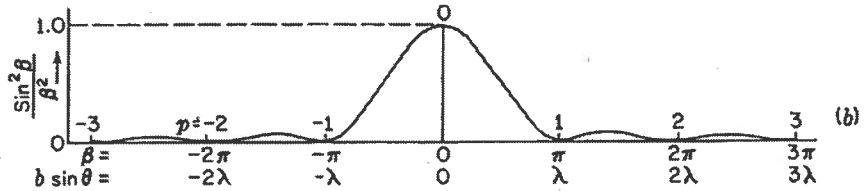

BOTH

