


Fanout – HTR scheme

Notes: SLBs require fanout of CLK40, BC0. FE-link possibly requires CLK80.
 3.3V-PECL fanout was tested in TB2002. One Cat6E cable (low x-talk) replaces the two Cat5E cables used in TB2002. HTR needs Broadcast bus, BCntRes and L1A: from TTCrx if we get it to work, otherwise we have to fan them out.

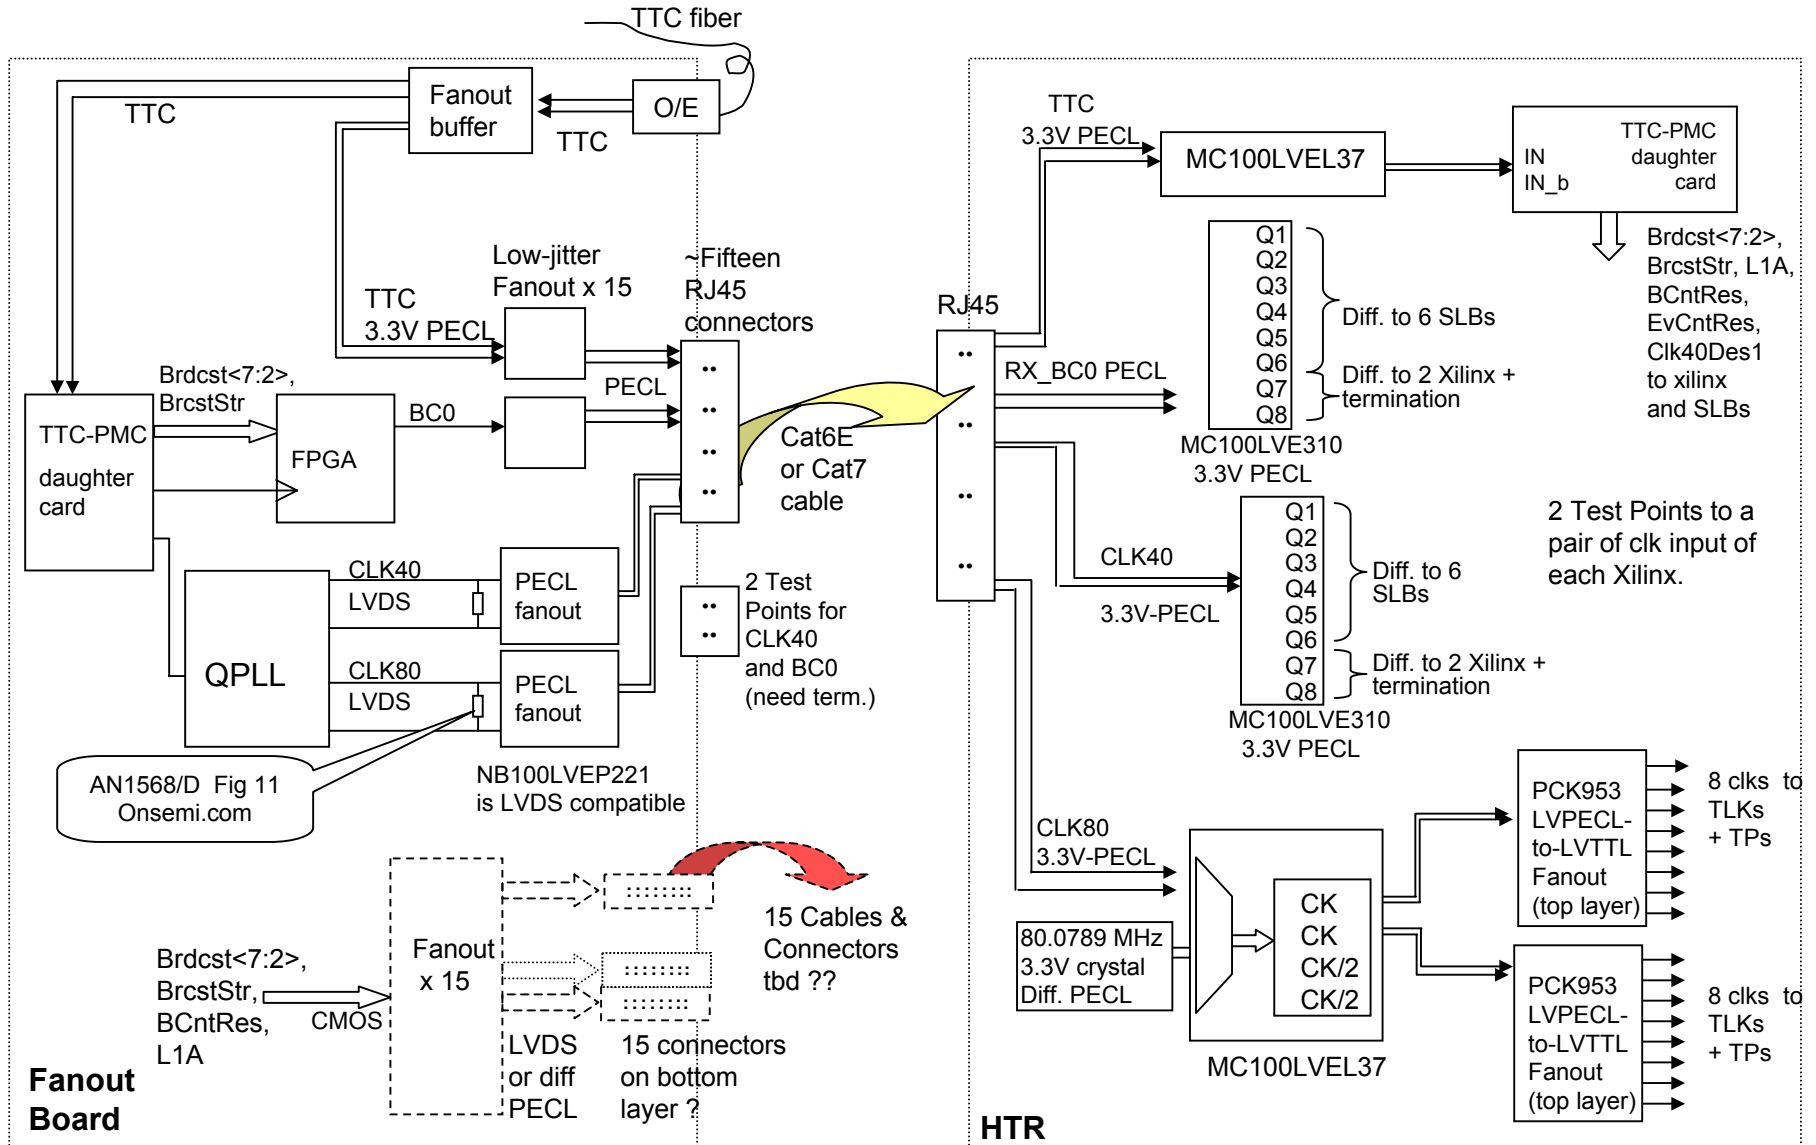

9U Front-panel space = 325 mm ; => space per connector ~ 21.5 mm